

The Latest in Web Compatible, Wireless Communication

SentekPlus is Sentek's wireless probe to internet solution. Sentek Plus utilises GPRS, 3G or satellite communication technology to send soil water data directly from the probe to the internet. Data is retrieved from the internet to be viewed in Sentek's IrriMax software.



SentekPlus Probe

- SentekPlus available with both EasyAG and EnviroSCAN probes.
- Sentek precision and reliability
- Probes configured with SentekPlus RS232 interface with in-built logging capability.

SentekPlus Data Transmission Unit (DTU)

SentekPlus DTU is located in close proximity to the probe via 5 metres of cable
The SentekPlus DTU comprises of:


- Communication module (GPRS, 3G or satellite) with antenna
- 12-volt battery with solar charger
- Front panel connectivity for local downloading (for ease of service and data access when telecommunication services unavailable)
- Front panel probe power switch for ease of servicing
- Easy to understand graphs
- Option to view graph via IrriMAX Live web platform
- EnviroSCAN quality data with undisturbed installation



All-in-one Soil Moisture Management Solution

Features

- Delivered as single complete unit
- Cable free
- Bluetooth configuration and diagnostics
- Long life battery
- Cellular/mobile phone or satellite telemetry
- Optional high gain antenna
- Easy to understand graphs
- Option to view graph via IrriMAX Live web platform
- EnviroSCAN quality data with undisturbed installation

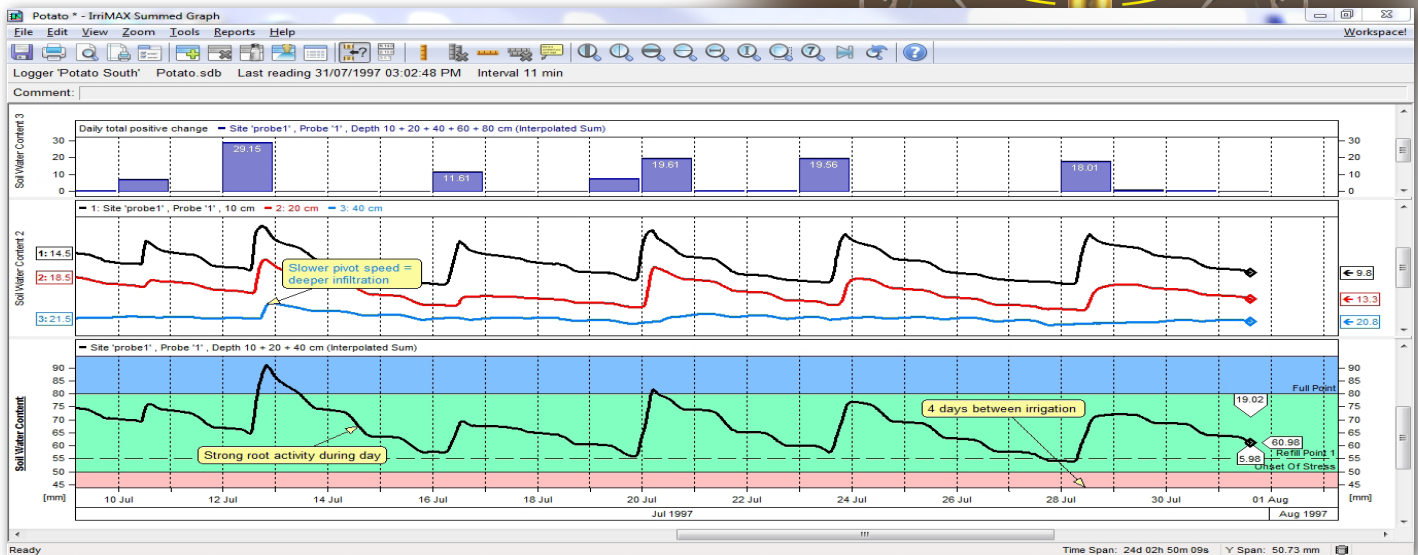

The graphs will tell you WHEN and HOW MUCH to irrigate

NO WASTED
WATER

NO WASTED
FERTILISER

NO WASTED
ENERGY

INCREASED
YIELDS

IMPROVED
QUALITY